


# 条形光源TR系列

## 条形光源 TR Series

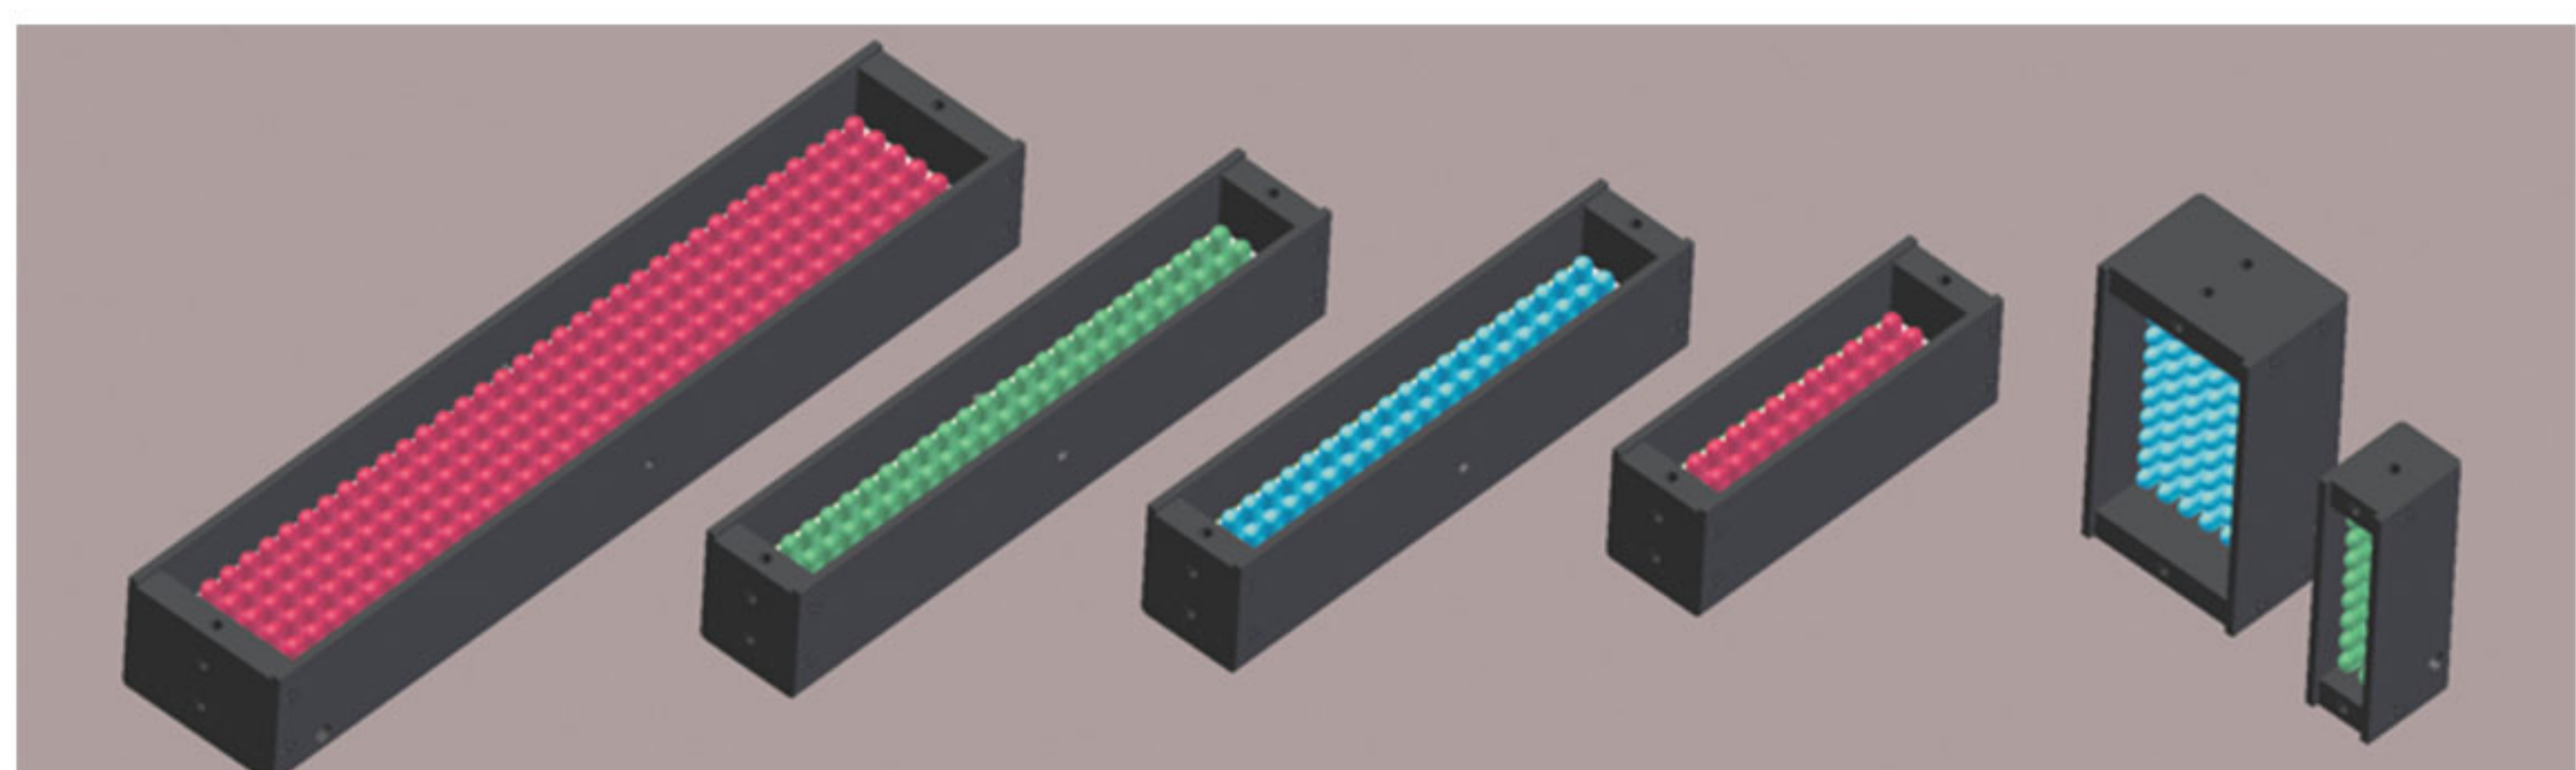

### 型号说明


Model: PL-TR00□□-□□



光源颜色: R(Red)/G(Green)/B(Blue)/W(White)/IR(850,940)/UV(365,390)

功耗: W,B,G,UV的功耗参照<功耗1> R,IR的功耗参照<功耗2>

TR系列条形光源特点	应用领域
● LED高密度配置+光学透镜	● 较大物体表面检测
● 均匀性好, 可做背光使用	● 图像扫描
● 红外, 紫外制作	● 二维码识别
● 标准24V供电 (12V可选)	● 条形边缺陷检测

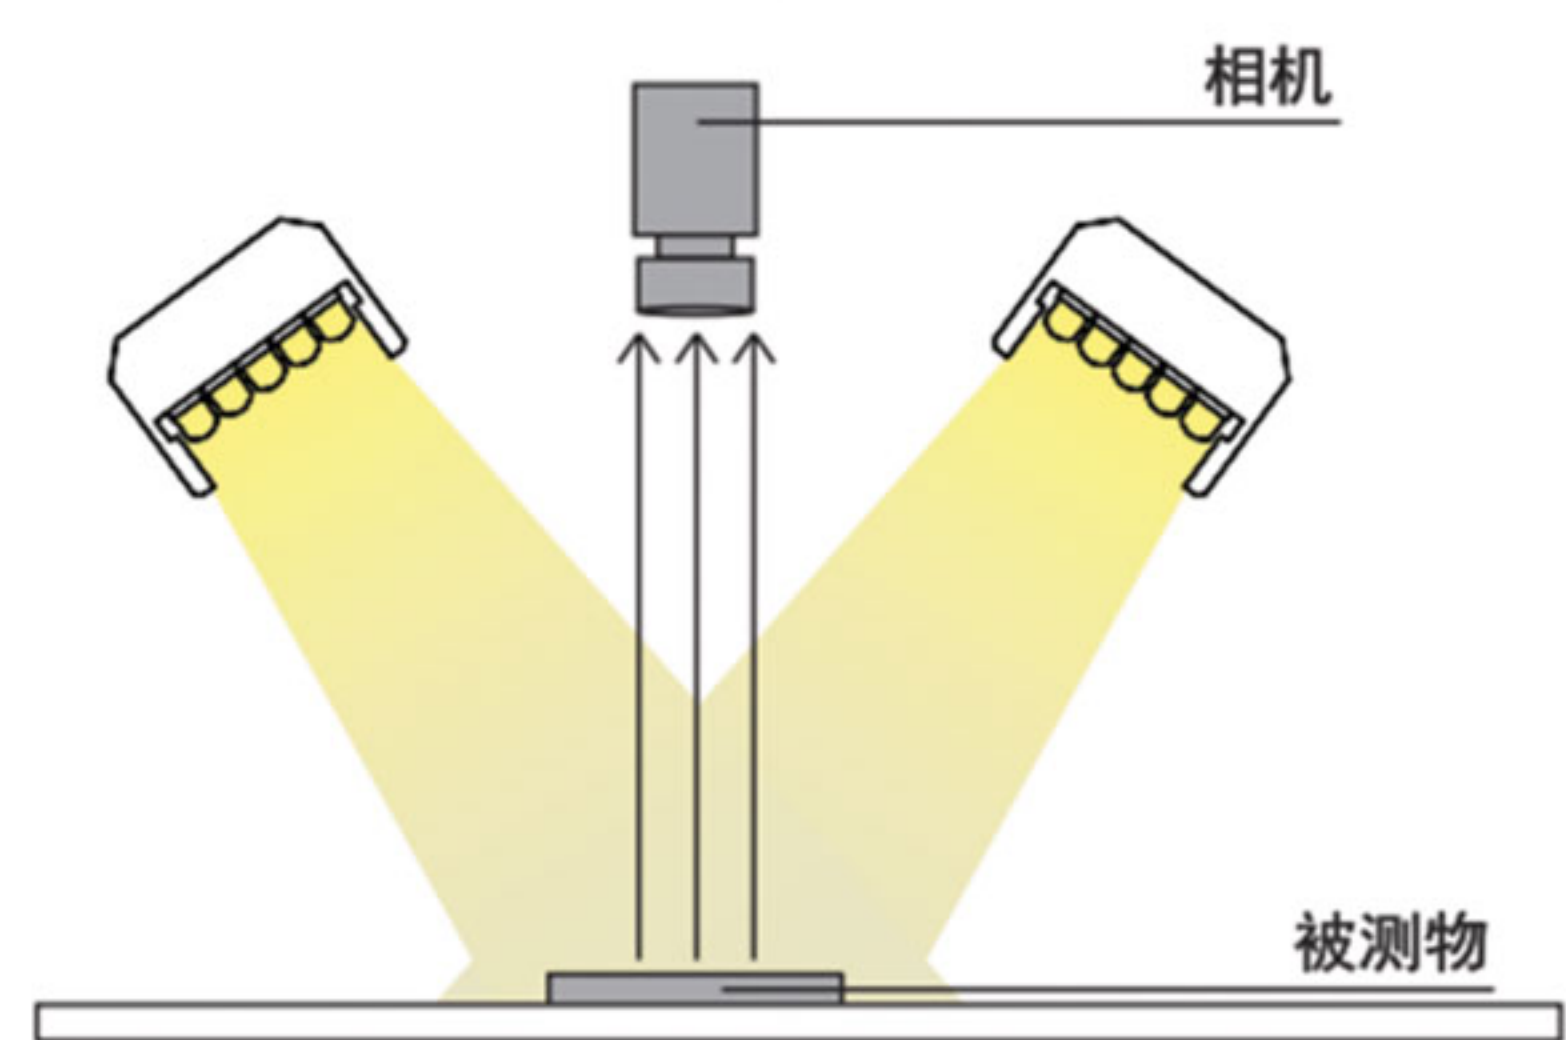

Model	A	B	C	D	E	F	G	功耗1(w)	功耗2(w)	图号
PL-TR3006-□□	30	7	35	13	18	5	-	0.36	0.24	1
PL-TR3022-□□	20	16	30	22	19	10	10	0.72	0.48	
PL-TR4418-□□	34	14	44	18	20	12	10	1.5	1	
PL-TR5006-□□	-	7	59	15	17	3	-	1	0.7	
PL-TR5528-□□	35	23	55	28	25	16	8	1.3	1	
PL-TR6020-□□	48	16	60	20	20	10	9	1.8	1.2	
PL-TR6624-□□	54	18	66	24	20	10	9	2.4	1.6	
PL-TR7623-□□	68	20	76	23	20	11	15	3.6	2.4	
PL-TR8427-□□	75	20	84	27	20	11	15	3.8	2.8	
PL-TR9028-□□	70	23	90	28	25	16	8	2.7	2.1	
PL-TR9035-□□	70	31	90	35	25	16	14	3.3	2.1	
PL-TR11222-□□	100	16	112	22	21	13	10	3.8	2.5	
PL-TR11252-□□	102.2	46	112	52	22	14	20	12.6	8.4	
PL-TR12528-□□	105	23	125	28	25	16	8	4.1	3.2	
PL-TR12535-□□	105	31	125	35	25	16	14	4.9	3.2	
PL-TR14030-□□	130.5	25	140	30	19	9.5	12	8.4	5.6	
PL-TR16028-□□	140	23	160	28	25	16	8	5.5	4.3	
PL-TR16035-□□	140	31	160	35	25	16	14	6.5	4.3	
PL-TR19528-□□	175	23	195	28	25	16	8	6.9	5.4	
PL-TR19535-□□	175	31	195	35	25	16	14	8.1	5.4	
PL-TR23028-□□	210	23	230	28	25	16	8	8.3	6.5	
PL-TR23035-□□	210	31	230	35	25	16	14	9.7	6.5	
PL-TR26528-□□	245	23	265	28	25	16	8	9.7	7.6	
PL-TR26535-□□	245	31	265	35	25	16	14	11.3	7.6	
PL-TR30028-□□	280	23	300	28	25	16	8	11.1	8.7	
PL-TR30035-□□	280	31	300	35	25	16	14	12.9	8.7	
PL-TR33528-□□	315	23	335	28	25	16	8	12.5	9.8	
PL-TR33535-□□	315	31	335	35	25	16	14	14.5	9.8	
PL-TR37028-□□	350	23	370	28	25	16	8	13.9	10.9	
PL-TR37035-□□	350	31	370	35	25	16	14	16.1	10.9	
PL-TR40528-□□	385	23	405	28	25	16	8	15.3	12	
PL-TR40535-□□	385	31	405	35	25	16	14	17.7	12	
PL-TR44028-□□	420	23	440	28	25	16	8	16.7	13.1	
PL-TR44035-□□	420	31	440	35	25	16	14	19.3	13.1	

### 条形光源尺寸 (mm)

